
YO-YODESK[®]GO 2


Assembly Manual

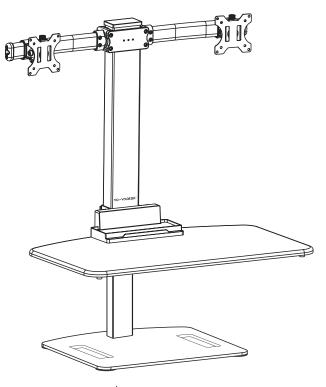

We highly recommend **Yo-Yo DESK GO** is assembled by two people together. Please first read all instructions carefully before assembling. Retain this manual for future reference. The specifications may vary slightly from the illustrations and are subject to change without notice.

ASSEMBLY KIT

The following items are included in your **Yo-Yo DESK GO**, please check you have each of them. If there are any tools or components missing, please contact customer services on +44 01793 575 082.

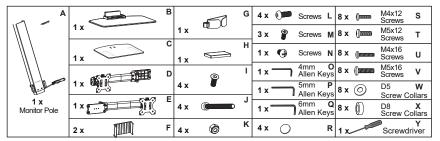

1

WARNING TWO PEOPLE REQUIRED



WEIGHT TOLERANCE LEVEL

We recommend a **combined weight** of desk equipment (ie laptop & monitor screen of **12 kg**) for optimal counterbalance. Below 5kg may make the transition between sitting & standing positions more stiff.

The Maximum weight tolerance is 12kg.

ASSEMBLY STEP 1

Align1) Base Plate with the Monitor Pole & then screw them together.

CAUTION -

Please place the **Yo-Yo DESK GO** on a surface suitable to hold the entire base of the **Yo-Yo DESK GO** otherwise you may cause damage when operating the **Yo-Yo DESK GO**.




YO-YODESK°GO 2

Page 3 / 8

YO

ASSEMBLY STEP 2

2) i Hold both LEFT and RIGHT sides of the **Monitor Arms** and carefully screw together

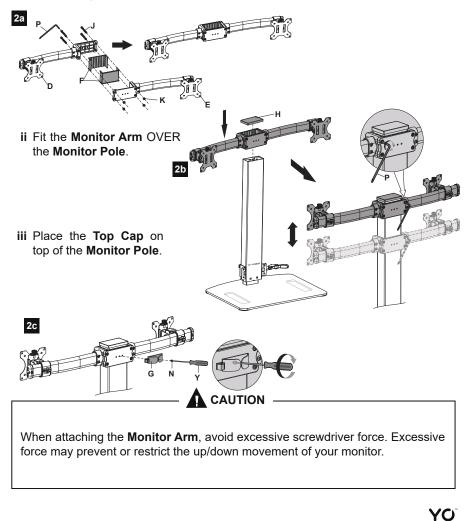


YO-YODESK[®]GO 2

Page 4 / 8

ASSEMBLY STEP 3

- **3a)** Insert the **Four Screws** at the back of the **Worktop.** Screw them in partly, avoid screwing in too tightly to allow some free movement.
- **3b)** Place **Worktop** over the bottom of the **Monitor Pole**, aligning the **Four Screws** with the **Monitor Pole**, & then tighten carefully.

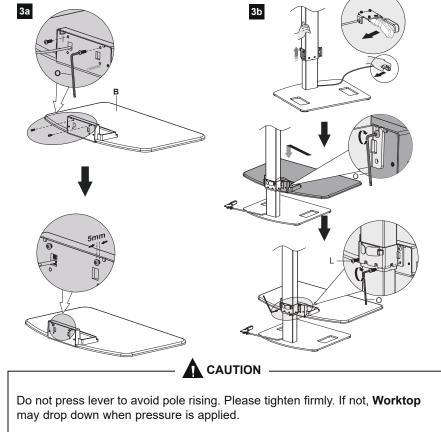




YO-YODESK[®]GO 2

Page 5 / 8

ASSEMBLY STEP 4


4) i Screw in the Up/Down Lever placing it underneath the RIGHT SIDE of the Worktop.

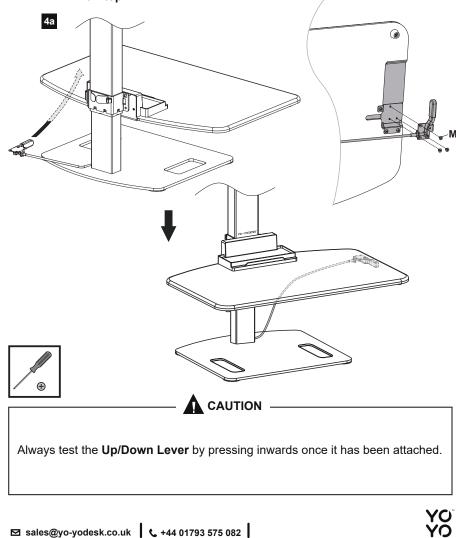

Page 6 / 8

ASSEMBLY STEP 5

5a,b & c) Attach the monitor on to the Monitor Arm.

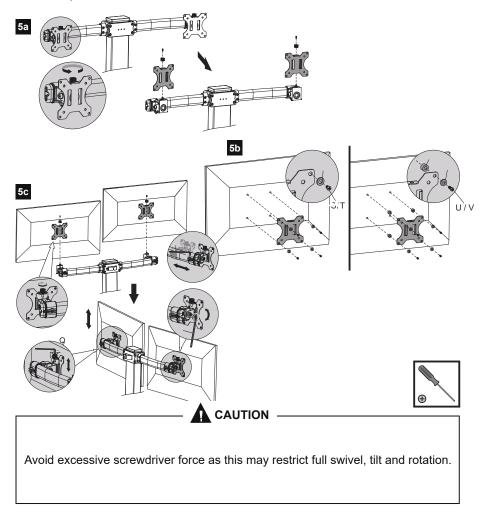

YO-YODESK[®]GO 2

Page 7 / 8

YO-YODESK[®]GO 2

ASSEMBLY STEP 6

6) To operate, use right hand to push Up/Down Lever in & if necessary when moving downwards apply pressure with your LEFT HAND to the back of the Worktop. Apply pressure on the left corner pressing the lever simultaneously. Sufficient weight on the Worktop should limit the necessity to do this. Pads can be placed on the bottom of the base for better adherence to the surface.

